


The disc element for use with standard screws

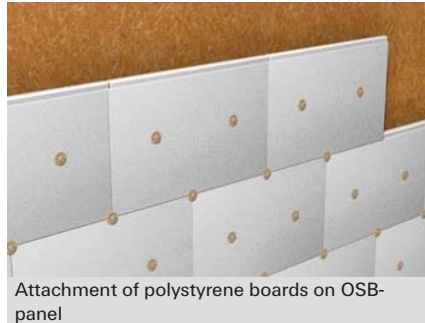

Attachment of polystyrene boards on OSB-panel

BUILDING MATERIALS

- Panel building materials
- Solid wood

ADVANTAGES

- The polystyrene plugs are included with the disc element Termofix H 10.
- In case of disc elements termofix H 50, 90 and 150 the disc is sealed using the sealing cap moulded on.
- An air column is produced between the screw head and this seal. This reduces thermal-transmission losses.
- Extremely economical thanks to different shank lengths. This allows the screw length to be reduced if necessary.
- Can be combined with the insulating discs DT 90, DT 110 and DT 140.

APPLICATIONS

- Attachment of ETICS insulating boards

FUNCTIONING

- The fixing (disc and screw) is set in push-through installation.
- Non-load-bearing layers such as adhesive and old plaster should not serve as an anchoring base.

4

TECHNICAL DATA



termofix H 10



termofix H 50



termofix H 90



termofix H 150

Item	Art.-No.	Shaft length L [mm]	Disk Ø [mm]	Disc lock	Colour	Sales unit [pcs]
termofix H 10	514288	29	60	PS plug (included)	green	200
termofix H 50	514289	69	60	Sealing cap (moulded on)	green	100
termofix H 90	514290	109	60	Sealing cap (moulded on)	green	100
termofix H 150	514291	169	60	Sealing cap (moulded on)	green	100